

PRODUCT DATA SHEET



FOR MANUAL USE



Eco FiberFilm™ MANUAL-HD

30%

Recycled Content


Eco FiberFilm™ is a NEW grade of FiberFilm™ product family with **30% Recycled Raw Materials**.

Eco FiberFilm™ Manual-HD is specifically designed for **High Demanding** manual applications & it offers **high pallet load stability** whilst it **costs less** than other high-performance stretch film for manual use in the market.

It has been **ergonomically designed** as to be **stretched and unwinded easily**. It has also much **lower weight** than conventional manual stretch film and the user can wrap a pallet quicker and with less effort.

Eco FiberFilm™ Manual-HD can **easily replace a standard stretch film of 23µm thickness or higher**.

Eco FiberFilm™ Manual-HD Performance Chart

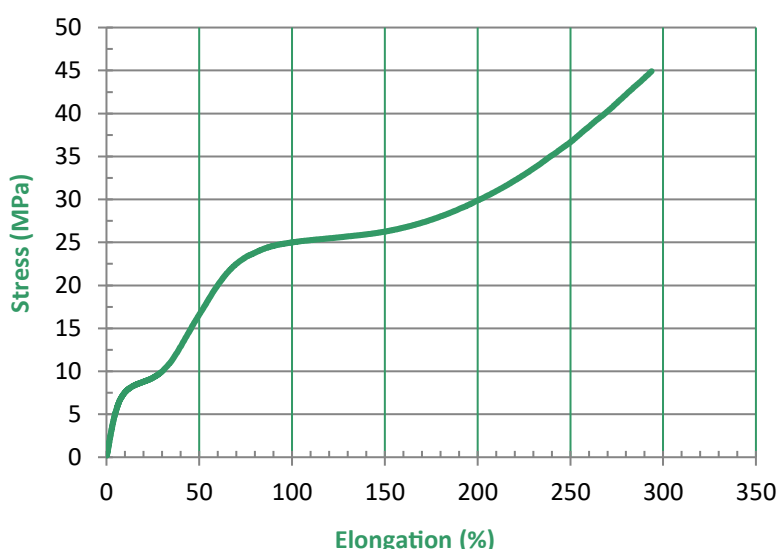

The graph above illustrates how the film performs under an increased load. Where the line ends indicates where the film breaks.

Technical Specifications

		TOLERANCE
Tensile strength at break (N/mm ²)	42,8	10%
Elongation at break (%)	248	10%
Film width (mm)	485	2%
Film weight (gr/m)	6	5%

Pallet dimensions: 80cm x 120cm x 115cm



Packaging Specifications

Film Length per Roll* (m)	300
Core diameter (mm)	51
Core Weight (kg)	0,2
Rolls per Box	6
Boxes per Pallet	22
Rolls per pallet	132
Gross Roll Weight (Kg)	2,0
Net Pallet Weight** (kg)	269
Length Tolerance*	±2%
Weight Tolerance**	±5%

V. 04_2023