

# A new Eco-Friendly Era in Stretch Films



**Stretch  
Up to 290%**

## ECO FIBER FILM™-HD *Light Core*

### Product Overview

Eco Fiber Film is a unique Eco-Friendly, high efficiency stretch film with reinforcement elements (fibers) that increase tear resistance.

#### Eco Fiber Film HD:

- Contains 30% Recycled Raw Materials
- Offers 50% less CO<sub>2</sub> than market average
- Offers at least 50% less plastic waste
- Is 100% Recyclable

### Technical Specifications

		Tolerance
Tensile strength at break (N/mm <sup>2</sup> )	25,5	10%
Elongation at break (%)	446	10%
Film width (mm)	485	2%
Film weight (gr/m)	10,24	5%

### Application Recommendations

Total stretch, up to 290%

Recommended stretch 270%

*Depending on the conditions (wrapping machine capabilities, temperature, humidity, pallet type, stretching speed), the total stretch should be adjusted accordingly*

#### Instructions for storage and use:

The film should be stored in closed, dry and dust-free rooms, storage temperature 15-25°C with complementary conditions:

Protected against sunrays exposure and away from heat-emitting sources (heaters, radiators, hot air ventilators)


-The film should be protected against humidity and dust

-The film should be protected against mechanical damages

-The film should be stored on the pallets. Direct contact with concrete or floor is not allowed

-The temperature recommended by film producer for proper film parameters during application +15°C to +30°C

### Eco Fiber Film-HD Performance Chart

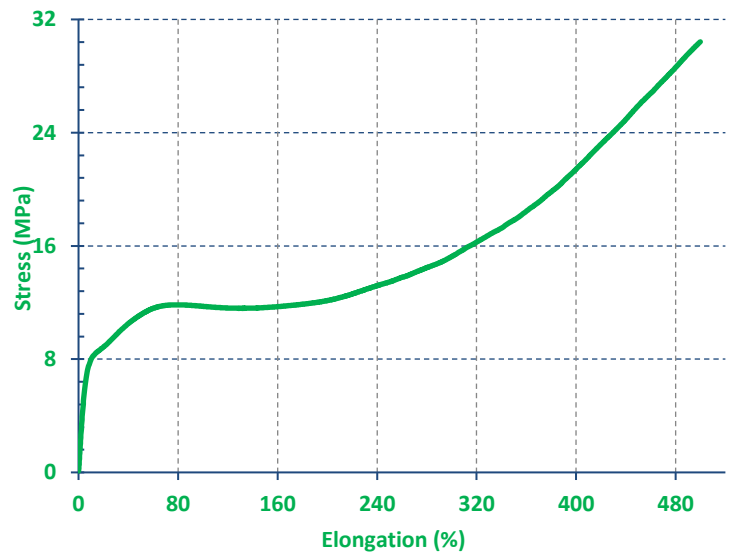

### Packaging Specifications

Gross Roll Weight* (kg)	12,3
Film Length per roll** (m)	1100
Roll Diameter (O.D.)*** mm	230
Core diameter (mm)	76
Core Weight (kg)	1,0
Rolls per pallet	36
Net Pallet Weight *(kg)	443
Weight Tolerance*	±5%
Length Tolerance**	±2%
Roll diameter Tolerance***	±2%

Pallet dimensions: 80cm x 120cm x 115cm

Disclaimer: Data presented herein is based on internal tests. No liability, warranty or guarantee of product performance is created by this document.