

PRODUCT DATA SHEET



FOR MACHINE USE



FIBER FILM™ ALPHA-GP

MINIMISE YOUR COST
PER PALLET

FIBER FILM ALPHA-GP *Light Core*

Product Overview

Fiber Film is a novel, high efficiency stretch film with reinforcement elements (fibers) that increase tear resistance.


Fiber Film **Alpha-GP** operates with **Semi - Automatic Wrapping Machines with Brake Tension System**.

Fiber Film **Alpha-GP** is designed for **General Purpose** applications and **usually replaces a stretch film of 18µm to 22µm thickness**.

Alpha-GP is applied to various load types providing:

- ✓ **Worry free performance: Place it – Forget it!**
- ✓ **No breakages during palletization**
- ✓ **Exceptional load retention & stability**

Fiber Film Alpha-GP Performance Chart

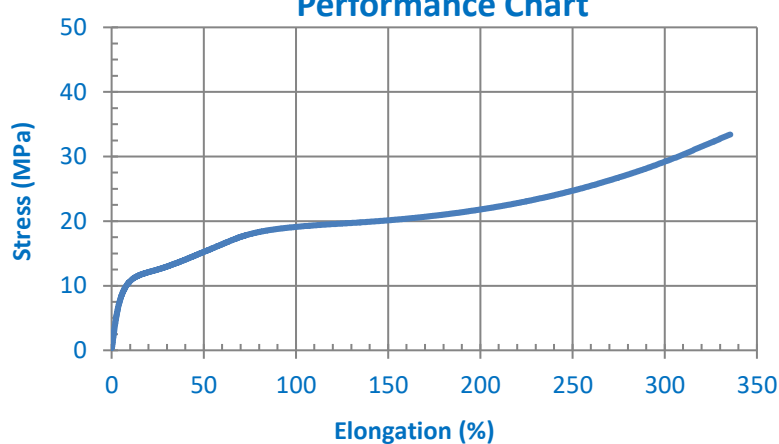

The graph above illustrates how the film performs under an increased load. Where the line ends indicates where the film breaks.

Technical Specifications

		TOLERANCE
Tensile strength at break (N/mm ²)	30,3	10 %
Elongation at break (%)	267	10 %
Film width (mm)	485	2 %
Film Weight (gr/m)	5,2	5 %

Pallet dimensions: 80cm x 120cm x 115cm



Packaging Specifications

Gross Roll Weight* (kg)	11,9
Film Length per roll** (m)	2100
Roll Diameter (O.D.)*** mm	228
Core diameter (mm)	76
Core Weight (kg)	1,0
Rolls per pallet	36
Net Pallet Weight *(kg)	427
Weight Tolerance*	±5 %
Length Tolerance**	±2 %
Roll diameter Tolerance***	±2 %

V. 04_2023