

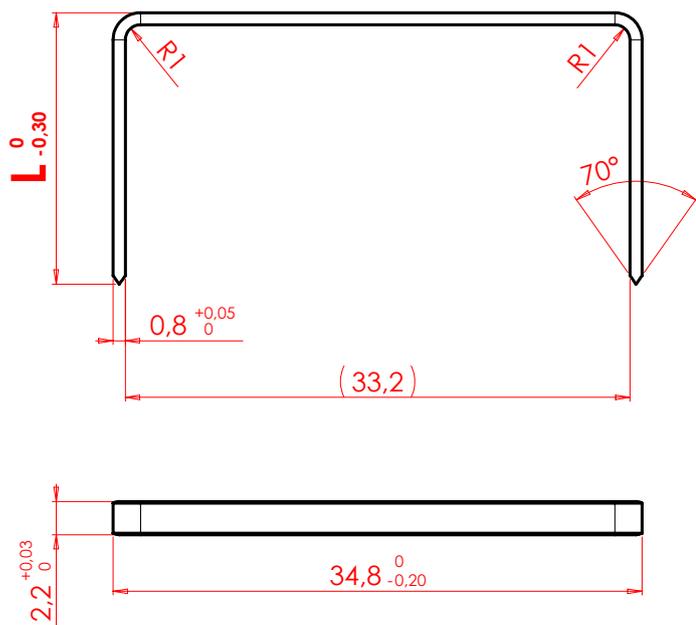


CALIBRO / GAUGE (scala 1:1)

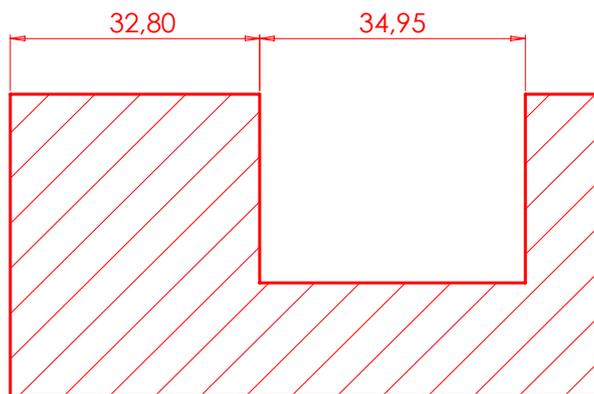

BARRETTA / STRIP (scala 1:1)

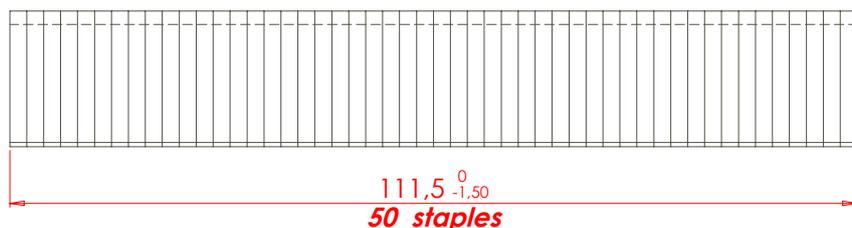

SERIE	L (mm)
35/15	15
35/18	18
35/22	22

CARATTERISTICHE / SPECIFICATION

Materiale / Material	Diametro filo / Round wire diameter	Resistenza / Tensile Strength	Finitura / Finishing	Copertura / Coating
Filo trafilato cotto / Redrawn steel wire	Ø 1,50 mm (16,5 gauge)	550 ÷ 650 N/mm ²	ramato 0,2 µm / coppered 0,2 µm	colla trasparente / transparent glue

COMPOSIZIONE CHIMICA / CHEMICAL COMPOSITION

C	Mn	P	S	Si
0,065	0,492	0,010	0,003	0,160

 CHIODATRICI - PUNTI METALLICI PNEUMATIC TOOLS AND FASTENERS Susegana (TV)	Finitura Vedi Disegno			Approvato da FL	Data 27/04/2015
	Trattamento Vedi Disegno			Disegnato da FL	Data 27/04/2015
Materiale Vedi disegno	Peso (g)	Toll. Gen.	Scala		
		± 0,10	2:1 (1:1)		
La OMER S.p.A. si riserva la proprietà del presente disegno con divieto di riprodurlo senza sua autorizzazione.	Descrizione / Codice STAPLES 35	Disegno - Revisione 35-1-s6			Tavola 1/1
					A4